

[PROTECTIVE SCREENS]

BATYLINE® ISO 62

Its exceptionally long life and its woven look have spelled success for Batyline® architectural textiles. Amateur sailors appreciate its exemplary behavior in damp conditions.



[TECHNICAL DATA]

Description	Support	Weight	Width	Length	Rupture resistance
Composite woven threads	PES HT 1100 dtex	500 g/m2	180 cm	50 linear m.	240/240 daN/5 cm
Tear resistance	Stability to light	Usable temperature range	Mold resistance	Warranty	Quality
40/40 daN/5 cm	≥ 7	- 20/+70° C	degree 0, excellent	2 years	ISO 9001




[COLOR SHADES] available in 2 colors:



[PROTECTIVE SCREENS]

BATYLINE® ISO 62

[COLOR SHADES] available in 2 colors:

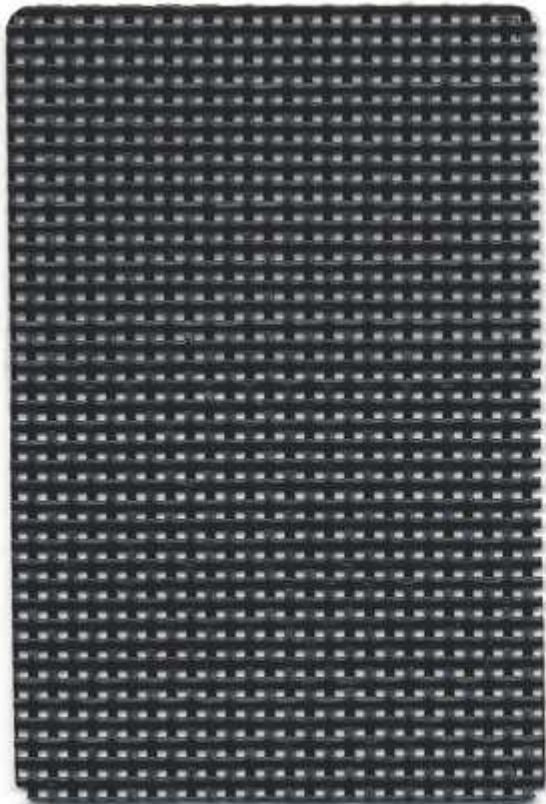

Ebène
Ébano

7407-5005



Neige
Nieve

7407-5001